


# The instruction of AirLinker Firmware update

1. Please download file named " update.img to your hard disk , copy it in a root directory of TF card . Please DO NOT try to rename or modify the file , otherwise you will be failed to upgrade firmware. We suggest you should have a TF card with 4GB space available.
2. Connect AirLinker dongle to TV, and power on it.
3. After enter the standby interface, insert above-mentioned TF card into the TF slot, the system will check it and will prompt a update window as following, and you can choose install or cancel the Update process.

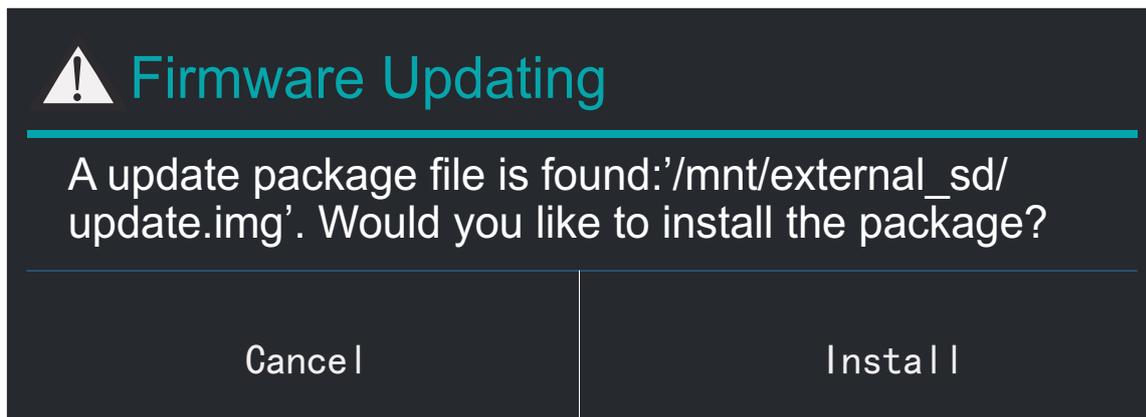

4. Choose "Install" , and Airlinker system will run update.img. Meanwhile, system will reboot, then a green robot and progress bar will be shown on the screen, until the system reboot and return to standby interface, the update process is successful.

## NOTE:

This instruction is ONLY for Model No.DR1 & Dr2.